
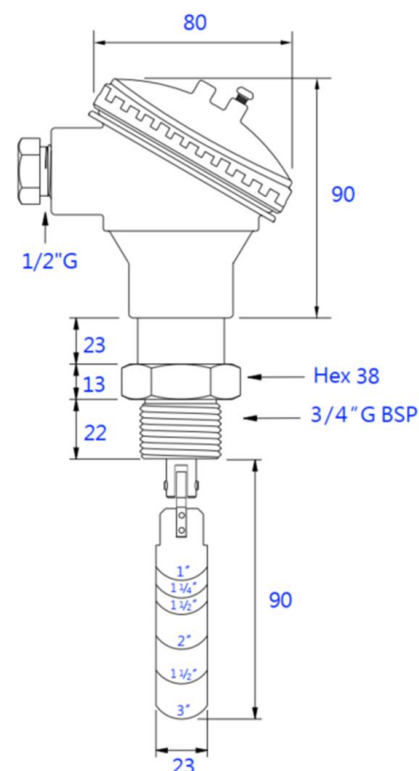


Paddle type flow switch BR-LFS-02H



Product Features:

- Mounting style : Top
- Mounting thread : $\frac{3}{4}$ " G BSP
- Operating pressure Max. : 355 psig
- Contact rating : 60VA/ 400VAC/DC
- Operating Temperature : $-3^{\circ}\text{C} \sim +150^{\circ}\text{C}$
- Maximum Pressure Drop : 3 psig
- Switch Repeatability : $\pm 5\%$
- Adjustment Accuracy : $\pm 25\%$
- Wetted material : SUS 304
- Housing material : Aluminium / IP65
- Temperature : Max 150°C

Flow range table – L/m

Pipe size / Paddle length	1"		1 1/4"		1 1/2"		2"		2 1/2"		3"	
	Act	De-Act	Act	De-Act	Act	De-Act	Act	De-Act	Act	De-Act	Act	De-Act
1"	18.92	15.14	32.17	24.60	45.42	34.06	64.35	56.78				
1 1/4"			24.60	17.03	34.06	26.49	56.78	45.42	87.06	75.70		
1 1/2"					52.99	37.85	87.06	60.56	121.13	94.63		
2"							68.13	45.42	90.84	64.35	124.91	102.20
2 1/2"									75.70	49.21	102.20	83.27
3"											83.27	60.56

Free Call 0800 323 327

ECEFAST NZ LIMITED NZBN: 9429037885434

sales@ecefazt.co.nz
www.ecefazt.co.nz