


Temperature sensor

Thermocouple (J, K, T) mineral insulated cable construction, ungrounded junction.
 RTD PT100 3 wire type (P) 316 stainless steel sheath, max. operating temperature 260°C
 Thermowells (pockets) are available as required

Model TS-10, TS-11 *Small* Aluminium termination head (IP65 rating)

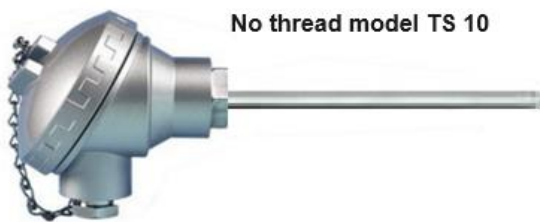

No thread model TS 10




1/2" BSP thread model TS 11

| Model | Cal. | Diameter | Length | Head |
|-------|----------------------|----------|----------------------|------------------|
| TS-1 | J type J | 3 mm | <input type="text"/> | 0 Standard alloy |
| | K type K | 4.5 mm | <input type="text"/> | |
| | T type T | 6 mm | <input type="text"/> | |
| | N type N | | | |
| | P type P | | | |
| | 0 no thread | | | |
| | 1 1/2" BSP SS thread | | | |

Model TS-12, TS-13 *Large* Aluminium termination head (IP65 rating)

TS-14, TS-15 *Large* Aluminium termination head **Duplex** (IP65 rating)

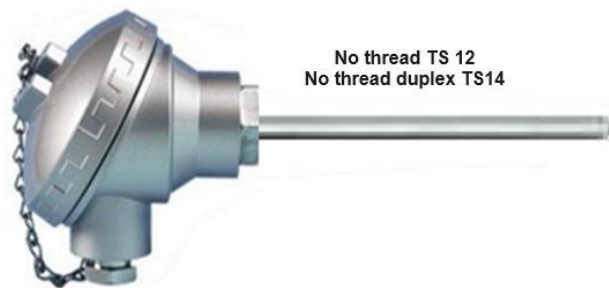

No thread TS 12
No thread duplex TS14



1/2" BSP thread model TS13
1/2" BSP thread duplex model TS15

| Model | Cal. | Diameter | Length | Head |
|-------|-----------------------------|----------|----------------------|------------------|
| TS-1 | J type J | 3 mm | <input type="text"/> | 0 Standard alloy |
| | K type K | 4.5 mm | <input type="text"/> | |
| | T type T | 6 mm | <input type="text"/> | |
| | N type N | | | |
| | P type PT100 | | | |
| | 2 no thread simplex | | | |
| | 3 1/2" BSP SS thread | | | |
| | 4 no thread duplex | | | |
| | 5 1/2" BSP SS thread duplex | | | |

Note: Head mount transmitters are available as option. It can be mounted and ranged as required in the large head models

Free Call 0800 323 327

ECEFAST NZ LIMITED NZBN: 9429037885434

info@ecefast.co.nz

www.ecefast.co.nz