


Temperature sensor

Thermocouple (J, K, T) mineral insulated cable construction, ungrounded junction.
 RTD PT100 3 wire type (P) 316 stainless steel sheath, max. operating temperature 260°C
 Thermowells (pockets) are available as required

Model TS-10, TS-11 *Small* Aluminium termination head (IP65 rating)

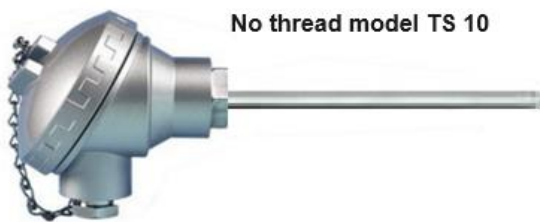

No thread model TS 10




1/2" BSP thread model TS 11

Model	Cal.	Diameter	Length	Head
TS-1	J type J	3 mm	<input type="text"/>	0 Standard alloy
	K type K	4.5 mm	<input type="text"/>	
	T type T	6 mm	<input type="text"/>	
	N type N			
	P type P			
	0 no thread			
	1 1/2" BSP SS thread			

Model TS-12, TS-13

TS-13, TS-15 *Large* Aluminium termination head (IP65 rating)

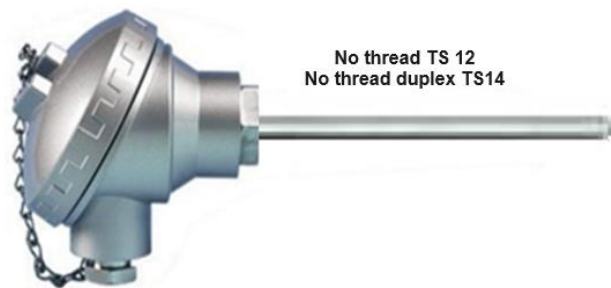

No thread TS 12
No thread duplex TS14



1/2" BSP thread model TS13
1/2" BSP thread duplex model TS15

Model	Cal.	Diameter	Length	Head
TS-1	J type J	3 mm	<input type="text"/>	0 Standard alloy
	K type K	4.5 mm	<input type="text"/>	
	T type T	6 mm	<input type="text"/>	
	N type N			
	P type PT100			
	2 no thread simplex			
	3 1/2" BSP SS thread			
	4 no thread duplex			
	5 1/2" BSP SS thread duplex			

Note: Head mount transmitters are available as option. It can be mounted and ranged as required in the large head models

Free Call 0800 323 327

ECEFAST NZ LIMITED NZBN: 9429037885434

info@ecefast.co.nz

www.ecefast.co.nz