


## Level switch BR-LCN1119

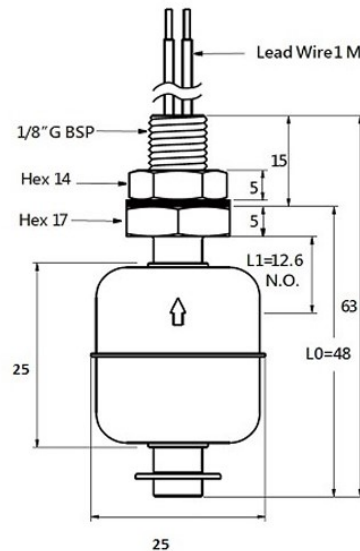

### Specification

Mounting Style	Internal
Mounting thread	1/8" G BSP
Stem material	SUS 304
Float material	SUS 316L
Operating temperature	-20°C to +120°C
Maximum pressure	10 bar
Float specific gravity	0.7
Minimum fluid specific gravity	0.8
Switching voltage max.	240VAC/200VDC
Switching rating VA	50W
Switching current max.	0.5A
Contact Form	N/O (N/C) Reversible, SPST
Carry current max.	1 A
Lead Wires	UL 3266 AWG 22 XLPE Lead Wire 1M

**Free Call 0800 323 327**

ECEFAST NZ LIMITED NZBN: 9429037885434

sales@ecefast.co.nz

www.ecefast.co.nz